


MINIMUM LETTERING HEIGHT OF 1", MOULDED INTO TOP OF COVER.


4 - 1" DIA. PICK HOLES SPACED EQUIDISTANT.

1/2" GUSSETS - ( 6 EACH @ 60 DEGREES ).

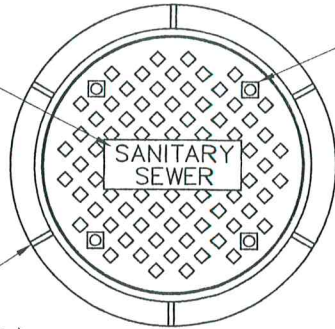


**PLAN**

N.T.S.

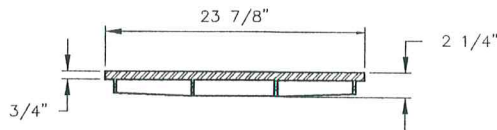

**COVER**

N.T.S.

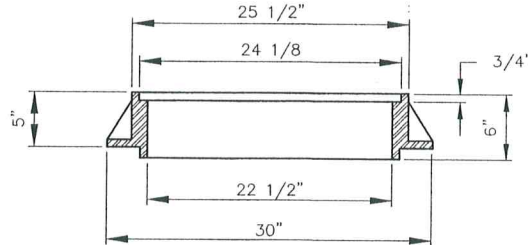


**FRAME**

N.T.S.

**NOTES:**

- (A) MANHOLE FRAMES AND COVERS TO HAVE A TOLERANCE OF 1/4" OR LESS.
- (B) COVERS NOT TO BE WARPED. REPLACE ALL THAT RATTLE OR VIBRATE WHEN TRAVELED UPON. MACHINE ALL MATCHING SURFACES
- (C) MINIMUM WEIGHT OF FRAME AND COVER = 251 LBS.

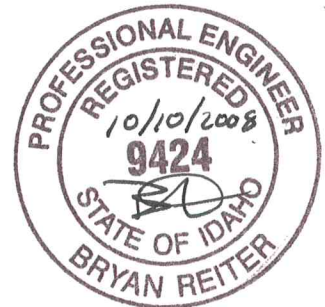

2005

IDAHO STANDARDS  
FOR PUBLIC WORKS  
CONSTRUCTION

**STANDARD MANHOLE  
COVER AND FRAME**

STANDARD DRAWING  
NO. **SD-507**