


MINIMUM LETTERING
HEIGHT OF 1", MOULDED
INTO TOP OF COVER.


4 - 1" DIA. PICK HOLES
SPACED EQUIDISTANT.

1/2" GUSSETS—
(6 EACH @ 60 DEGREES).




PLAN

N.T.S.

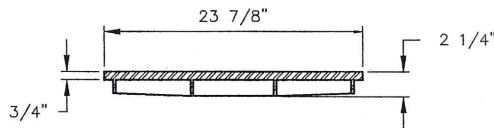

COVER

N.T.S.

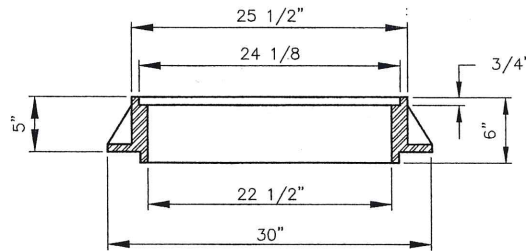

FRAME

N.T.S.

NOTES:

- (A) MANHOLE FRAMES AND COVERS TO HAVE A TOLERANCE OF 1/4" OR LESS.
- (B) COVERS NOT TO BE WARPED. REPLACE ALL THAT RATTLE OR VIBRATE WHEN TRAVELED UPON. MACHINE ALL MATCHING SURFACES
- (C) MINIMUM WEIGHT OF FRAME AND COVER = 251 LBS.



2005

IDAHO STANDARDS
FOR PUBLIC WORKS
CONSTRUCTION

**STANDARD MANHOLE
COVER AND FRAME**

STANDARD DRAWING
NO. **SD-507**